


Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	14"	ENCLOSED	3"	2120	8"	6"	2

SINGLE VOLUTE

MOUNTING CONFIG.: F, EM

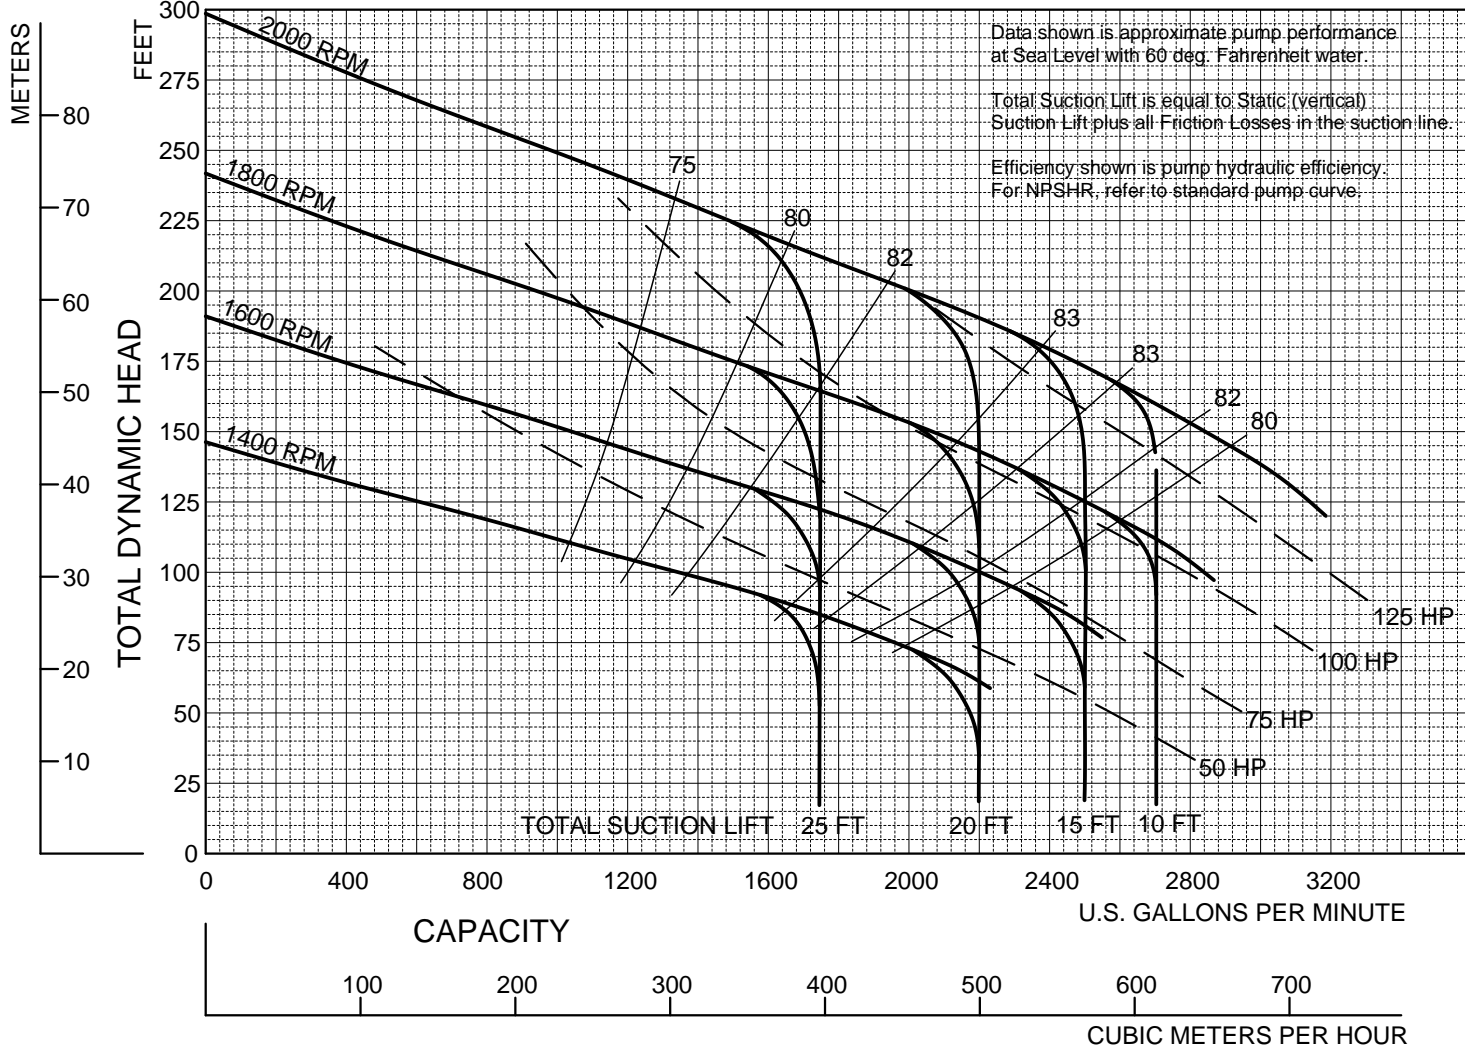

Add 1.5 HP for belt driven diaphragm vacuum pump. Performance curve does not include discharge check valve losses.

Performances shown are for cool water, frame mounted configuration with Cycloseal®. Other liquids or mounting configurations may require performance adjustments.

6/17/02



Cornell Pump Company • Portland, Oregon

6NHTA REDI • PRIME® - VARIOUS RPM

SUPERSEDES 5/13/02

6NHTARPV